




ARLON

PRODUCT CATALOG

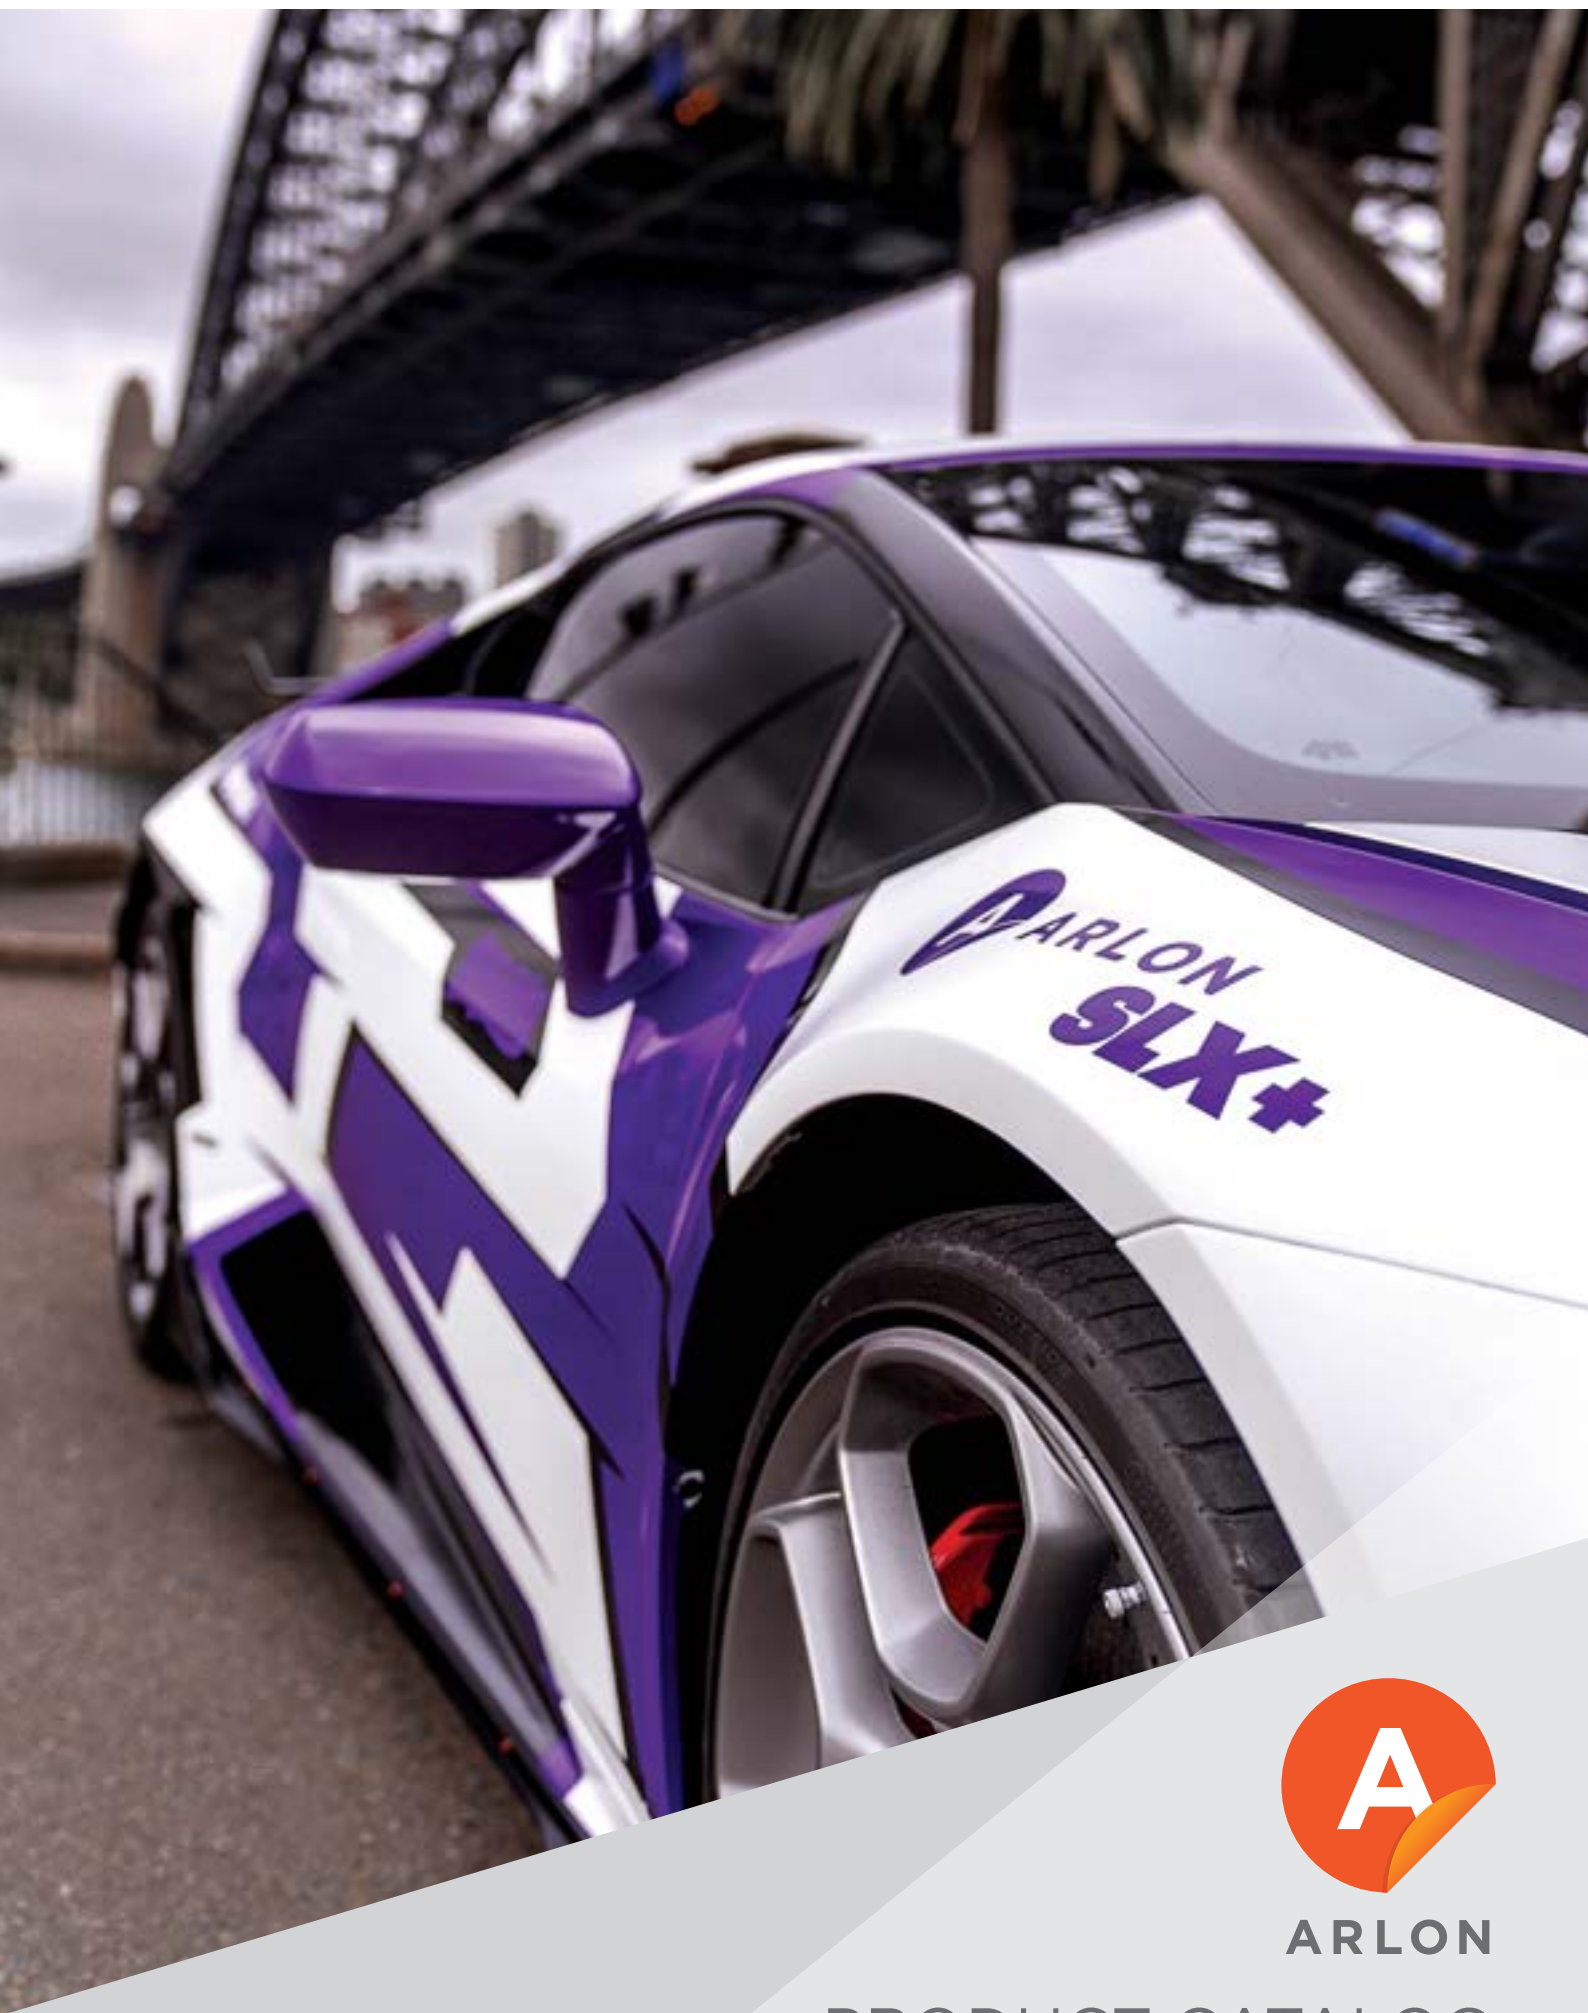

## Your Partner of Choice

Arlon, established in 1958 near Los Angeles, California, is a leading global manufacturer of pressure-sensitive adhesive vinyls for the sign and graphics industry.

As one of the world's most experienced casting companies, Arlon has gained a worldwide reputation for quality and innovation.



## WRAPITRIGHT.COM

WrapItRight.com gives you access to expert advice and tutorials from industry leaders and specialists!

- ▶ How-to video library featuring vehicle wraps, commercial signage, and digital printing techniques.
- ▶ Create custom playlists and watch videos later.
- ▶ Get updates on Trade Shows and Training Events.

Throughout this brochure you will see companion how-to videos featuring recommended methods and techniques. Videos can be accessed by using the QR code or visiting [wrapitright.com](http://wrapitright.com).



**PRODUCT  
Questions?**

WE'RE HERE

### EUROPE CUSTOMER SERVICE:

- e [ArlonEuropeCS@arlon.com](mailto:ArlonEuropeCS@arlon.com)
- p Head Office: +31 70 354 4311

*Arlon is proudly ISO  
9001:2015 certified.*





# Table of Contents

|                               |           |
|-------------------------------|-----------|
| At-a-Glance Products Chart    | <b>4</b>  |
| Benefits of FLITE Technology® | <b>6</b>  |
| Vehicle Films                 | <b>10</b> |
| Architectural Range           | <b>18</b> |
| •Interior Wall Films          | <b>20</b> |
| •Exterior Wall Films          | <b>22</b> |
| •Window Films                 | <b>24</b> |
| •Floor Films                  | <b>26</b> |
| Commercial Films              | <b>32</b> |
| Overlaminates                 | <b>38</b> |
| Banners                       | <b>40</b> |

| Category      |                     |                     |              |             |                  |                            | Durability Unprinted<br>(in Years) | Film |        |                           |        |                   | Adhesive            |           |           |                |                 | Surfaces   |       |      |             |                 |               |          | Ink                 |        |         |          |                                                                                       |
|---------------|---------------------|---------------------|--------------|-------------|------------------|----------------------------|------------------------------------|------|--------|---------------------------|--------|-------------------|---------------------|-----------|-----------|----------------|-----------------|------------|-------|------|-------------|-----------------|---------------|----------|---------------------|--------|---------|----------|---------------------------------------------------------------------------------------|
| Vehicle Films | Interior Wall Films | Exterior Wall Films | Window Films | Floor Films | Commercial Films |                            |                                    | Name | Type   | Thickness<br>(in Microns) | Finish | Flite Technology® | X-Scape Technology® | Permanent | Removable | Clean Removing | High/Ultra Tack | Air-Egress | Color | Flat | Soft Curves | Compound Curves | Deep Channels | Textured | Low Energy Surfaces | Indoor | Outdoor | Solvents | UV                                                                                    |
| ●             |                     |                     |              |             |                  | Premium Colour Change      | 10                                 | C    | 76-84  | G/M S                     | ●      |                   | ●                   |           | ●         |                | ●               | C/G/W/S    | ●     | ●    | ●           | ●               | ●             |          | ●                   | ●      | N/A     | N/A      | N/A                                                                                   |
| ●             |                     |                     |              |             |                  | SLX+®                      | 10                                 | C    | 50     | G                         | ●      |                   | ●                   |           | ●         |                | ●               | LG         | ●     | ●    | ●           | ●               | ●             |          | ●                   | ●      | ●       | ●        |    |
| ●             |                     |                     |              |             |                  | SLX™ Cast Wrap             | 10                                 | C    | 50     | G                         | ●      |                   | ●                   |           | ●         |                | ●               | LG         | ●     | ●    | ●           | ●               | ●             |          | ●                   | ●      | ●       | ●        |    |
| ●             |                     |                     |              |             |                  | DPF 6100XLP                | 10                                 | C    | 50     | G                         |        | ●                 | ●                   |           | ●         |                | ●               | LG         | ●     | ●    | ●           | ●               | ●             |          | ●                   | ●      | ●       | ●        |    |
| ●             |                     |                     |              |             | ●                | DPF 6000XRP                | 10                                 | C    | 50     | G                         |        | ●                 | ●                   |           | ●         |                | ●               | LG         | ●     | ●    | ●           | ●               | ●             |          | ●                   | ●      | ●       | ●        |    |
| ●             |                     |                     |              |             | ●                | DPF 6000RP White           | 10                                 | C    | 50     | G                         |        |                   | ●                   |           | ●         |                |                 | LG         | ●     | ●    | ●           | ●               | ●             |          | ●                   | ●      | ●       | ●        |    |
| ●             |                     |                     |              |             | ●                | DPF 6000RP Clear           | 7                                  | C    | 50     | G                         |        |                   | ●                   |           |           |                |                 | C          | ●     | ●    | ●           | ●               | ●             |          | ●                   | ●      | ●       | ●        | ●                                                                                     |
| ●             |                     |                     |              |             |                  | Fusion Wrap                | 7                                  | P    | 60     | G                         | ●      |                   | ●                   |           | ●         |                | ●               | LG         | ●     | ●    | ●           |                 | ●             |          | ●                   | ●      | ●       | ●        |    |
| ●             |                     |                     |              | ●           | ●                | DPF 4600GLX                | 7                                  | P    | 80     | G                         |        | ●                 | ●                   |           | ●         | ●              | ●               | LG         | ●     | ●    | ●           | ●               |               |          | ●                   | ●      | ●       | ●        |    |
| ●             |                     |                     |              |             |                  | ILLUMINITE WRAP™           | 7                                  | C    | 125    | G                         | ●      |                   | ●                   |           |           |                | ●               | LG         | ●     | ●    | ●           |                 |               |          | ●                   | ●      | ●       | ●        |    |
| ●             |                     |                     |              |             |                  | DPF 2400XLP                | 7                                  | C    | 125    | G                         |        | ●                 | ●                   |           |           |                | ●               | LG         | ●     | ●    | ●           |                 |               |          | ●                   | ●      | ●       | ●        |    |
| ●             |                     |                     |              |             | ●                | DPF 2400                   | 7                                  | C    | 125    | G                         |        |                   | ●                   |           |           |                |                 | C          | ●     | ●    |             |                 |               |          | ●                   | ●      | ●       |          |                                                                                       |
| ●             |                     | ●                   |              | ●           | ●                | DPF 8000™ Ultra Tack White | 7                                  | P    | 90     | S                         |        |                   | ●                   |           |           | ●              | ●               | C          | ●     | ●    |             |                 | ●             | ●        | ●                   | ●      | ●       | ●        |  |
| ●             |                     |                     |              |             | ●                | DPF 4550GTX/MTX            | 5                                  | P    | 70     | G/M                       |        | ●                 | ●                   |           |           |                | ●               | LG         | ●     |      |             |                 |               |          | ●                   | ●      | ●       | ●        | ●                                                                                     |
| ●             |                     |                     |              |             | ●                | DPF 4550GT/MT              | 5                                  | P    | 70     | G/M                       |        |                   | ●                   |           |           |                |                 | LG         | ●     |      |             |                 |               |          | ●                   | ●      | ●       | ●        | ●                                                                                     |
| ●             |                     |                     |              |             | ●                | DPF 4550G                  | 5                                  | P    | 70     | G                         |        |                   | ●                   |           |           |                |                 | C          | ●     |      |             |                 |               |          | ●                   | ●      | ●       | ●        | ●                                                                                     |
|               | ●                   |                     |              |             |                  | DPF 4200                   | 7                                  | P    | 150    | M/C                       |        |                   | ●                   |           | ●         |                |                 | C          | ●     | ●    |             |                 | ●             |          | ●                   |        | ●       | ●        |  |
|               | ●                   |                     |              |             | ●                | DPF 4300                   | 4                                  | P    | 86     | M                         |        |                   |                     | ●         | ●         |                |                 | C          | ●     |      |             |                 |               |          | ●                   | ●      | ●       | ●        | ●                                                                                     |
|               | ●                   |                     |              | ●           | ●                | DPF 510 Ultra Tack         | 3                                  | M    | 100    | G/M                       |        |                   | ●                   |           |           | ●              |                 | C/LG       | ●     |      |             |                 |               |          | ●                   | ●      | ●       |          | ●                                                                                     |
|               |                     |                     |              |             | ●                | DPF 8000™ Ultra Tack Clear | 7                                  | P    | 75     | L                         |        |                   | ●                   |           |           | ●              |                 | C          | ●     | ●    |             |                 | ●             | ●        | ●                   | ●      | ●       | ●        | ●                                                                                     |
|               |                     | ●                   |              | ●           | ●                | DPF 8200 High Tack         | 7                                  | P    | 90     | S                         |        |                   | ●                   |           |           | ●              |                 | C          | ●     | ●    |             |                 | ●             | ●        | ●                   | ●      | ●       | ●        |  |
|               |                     | ●                   |              |             | ●                | DPF 8200X High Tack        | 7                                  | P    | 90     | S                         |        | ●                 | ●                   |           |           | ●              | ●               | C          | ●     | ●    |             |                 | ●             | ●        | ●                   | ●      | ●       | ●        |  |
|               |                     |                     | ●            |             |                  | SERIES 5400                | 5/2▼                               | P    | 80     | M                         |        |                   | ●                   |           |           |                |                 | C          | ●     |      |             |                 |               |          | ●                   | ●      | N/A     | N/A      | N/A                                                                                   |
|               |                     |                     | ●            |             |                  | DPF 5200                   | 7                                  | C    | 50     | M                         |        |                   | ●                   |           |           |                |                 | C          | ●     |      |             |                 |               |          | ●                   | ●      | ●       | ●        | ●                                                                                     |
|               |                     |                     | ●            |             |                  | DPF 50WD White/Clear       | 2/1▼                               | P    | 90/100 | G/M                       |        |                   |                     | ●         | ●         |                |                 | C          | ●     |      |             |                 |               |          | ●                   | ●      | ●       | ●        | ●                                                                                     |
|               |                     |                     | ●            |             |                  | DPF 45WF                   | 1                                  | M    | 150    | S                         |        |                   |                     | ●         | ●         |                |                 | C          | ●     |      |             |                 |               |          | ●                   | ●      | ●       | ●        | ●                                                                                     |
|               |                     |                     |              |             | ●                | DPF 510G/M                 | 3                                  | M    | 100    | G/M                       |        |                   | ●                   |           |           |                |                 | C          | ●     |      |             |                 |               |          | ●                   | ●      | ●       |          | ●                                                                                     |
|               |                     |                     |              | ●           | ●                | DPF 510GTR/MTR             | 3                                  | M    | 100    | G/M                       |        |                   |                     | ●         |           |                |                 | LG         | ●     |      |             |                 |               |          | ●                   | ●      | ●       |          | ●                                                                                     |
|               |                     |                     |              | ●           | ●                | DPF 510GT/MT               | 3                                  | M    | 100    | G/M                       |        |                   | ●                   |           |           |                |                 | LG         | ●     |      |             |                 |               |          | ●                   | ●      | ●       |          | ●                                                                                     |

| CATEGORY      |         |                    | DURABILITY UNPRINTED (IN YEARS) | FILM |      |                        | ADHESIVE |           |           |                |                 |            | SURFACES |      |             |                 |               |          |                     |        | INK     |          |     |
|---------------|---------|--------------------|---------------------------------|------|------|------------------------|----------|-----------|-----------|----------------|-----------------|------------|----------|------|-------------|-----------------|---------------|----------|---------------------|--------|---------|----------|-----|
| OVERLAMINATES | BANNERS |                    |                                 | NAME | TYPE | THICKNESS (IN MICRONS) | FINISH   | PERMANENT | REMOVABLE | CLEAN REMOVING | HIGH/ULTRA TACK | AIR-EGRESS | COLOR    | FLAT | SOFT CURVES | COMPOUND CURVES | DEEP CHANNELS | TEXTURED | LOW ENERGY SURFACES | INDOOR | OUTDOOR | SOLVENTS | UV  |
| ●             |         | SERIES 3170        | 7                               | C    | 35   | G                      | ●        |           |           |                |                 | C          | ●        | ●    | ●           |                 | ●             |          | ●                   | ●      | N/A     | N/A      | N/A |
| ●             |         | SERIES 3200        | 7                               | C    | 50   | G                      | ●        |           |           |                |                 | C          | ●        | ●    | ●           | ●               | ●             |          | ●                   | ●      | N/A     | N/A      | N/A |
| ●             |         | SERIES 3210        | 7                               | C    | 35   | G                      | ●        |           |           |                |                 | C          | ●        | ●    | ●           | ●               | ●             |          | ●                   | ●      | N/A     | N/A      | N/A |
| ●             |         | SERIES 3220        | 7                               | C    | 50   | G/M                    | ●        |           |           |                |                 | C          | ●        | ●    | ●           | ●               | ●             |          | ●                   | ●      | N/A     | N/A      | N/A |
| ●             |         | SERIES 3270        | 7                               | C    | 50   | G/M                    | ●        |           |           |                |                 | C          | ●        | ●    | ●           | ●               | ●             |          | ●                   | ●      | N/A     | N/A      | N/A |
| ●             |         | SERIES 3310 🌿      | 10                              | PU   | 38   | G                      | ●        |           |           |                |                 | C          | ●        | ●    | ●           | ●               | ●             |          | ●                   | ●      | N/A     | N/A      | N/A |
| ●             |         | SERIES 3420        | 5                               | P    | 75   | G/M/S                  | ●        |           |           |                |                 | C          | ●        |      |             |                 |               |          | ●                   | ●      | N/A     | N/A      | N/A |
| ●             |         | SERIES 3450        | 5                               | P    | 80   | G/M                    | ●        |           |           |                |                 | C          | ●        |      |             |                 |               |          | ●                   | ●      | N/A     | N/A      | N/A |
| ●             |         | SERIES 3510        | 3                               | M    | 80   | G/M                    | ●        |           |           |                |                 | C          | ●        |      |             |                 |               |          | ●                   | ●      | N/A     | N/A      | N/A |
| ●             |         | SERIES 3350        | 10                              | PVDF | 50   | S                      | ●        |           |           |                |                 | C          | ●        |      |             |                 |               |          | ●                   | ●      | N/A     | N/A      | N/A |
| ●             |         | PROTEC SERIES 3960 | 2                               | M    | 305  | G                      | ●        |           |           |                |                 | C          | ●        | ●    |             |                 |               |          | ●                   | ●      | N/A     | N/A      | N/A |
|               | ●       | DPF 208 🌿          | 1                               | PP   | 200  | S                      | N/A      | N/A       | N/A       | N/A            | N/A             | N/A        | ●        |      |             |                 |               |          | ●                   |        | ●       |          |     |
|               | ●       | DPF 210            | 1                               | PL   | 250  | S/P                    | N/A      | N/A       | N/A       | N/A            | N/A             | N/A        | ●        |      |             |                 |               |          | ●                   |        | ●       |          |     |
|               | ●       | DPF 215            | 1                               | PL   | 370  | S                      | N/A      | N/A       | N/A       | N/A            | N/A             | N/A        | ●        |      |             |                 |               |          | ●                   |        | ●       |          |     |

## ARLON DICTIONARY:

**Permanent Adhesives:** Designed for short, medium and long-term applications. May need heat and/or chemicals to be removed.

**Removable Adhesives:** Designed for short-term applications. Can be removed without heat or chemicals, with little or no adhesive left behind.

**Clean Removing Adhesives:** An added feature of some permanent adhesives. Up to 30% of adhesive may stay behind during film removal.

**Air-Egress:** Air channels in the adhesive that allows air to release when bubbles are formed. Helps for an easier installation. The adhesive used could be permanent or removable.

## CHART CAPTION:

### DURABILITY:

▼ Years durability for outdoor applications

### TYPES:

**C:** Cast **P:** Polymeric **M:** Monomeric **PU:** Polyurethane **PVDF:** Polyvinylidene fluoride (PVC free) **PP:** Polypropylene **PL:** Polyester

### FINISHES:

**G:** Gloss finish **M:** Matte finish **S:** Satin finish **L:** Luster **EG:** Etched glass finish **P:** Pebble finish **C:** Canvas

### TECHNOLOGIES:

**FLITE Technology®:**  **X-Scape Technology®:** 

### CLEAN REMOVING:

♠: Clean removing is only for vehicle applications

### ADHESIVES:

■: Available for special order, please refer to your Arlon Business Development Manager **LG:** Light Grey Adhesive **C:** Clear Adhesive **G:** Grey Adhesive **W:** White Adhesive **S:** Silver Adhesive

### SURFACES:

♣: Only with overlaminate Series 3170

### INKS:

**Solvent:** Printable with solvent and eco-solvent inks **Latex:** The logo  means the film is certified for HP Latex Inks

### OVERLAMINATES (in the catalog):

★: Recommended overlaminate

### PVC FREE:

 Environmentally Friendly

# HOW DOES YOUR BUSINESS BENEFIT FROM **FLITE TECHNOLOGY®?**



**FLITE**<sup>®</sup>  
TECHNOLOGY

FLITE Technology<sup>®</sup> is a lite contact, repositionable system based on a unique adhesive and liner combination. An installer will experience the easiest to apply products in the market.



## **25% FASTER**

FLITE Technology<sup>®</sup> wrap films allow you to get a vehicle wrapped up to 25% faster compared to other films. Applications on flat surfaces can be done even up to 40-50% faster!

## **A REAL MONEY-SAVER**

Finishing applications faster means more vehicles wrapped in the same time. FLITE Technology<sup>®</sup> saves a lot of time per vehicle: reduced labor costs will enable your business to thrive.

### **FLITE Technology<sup>®</sup> wrap films offer:**

- ▶ Superior Repositionability
- ▶ Vibrant & Reliable Print Quality
- ▶ Long Term Bond
- ▶ High Durability
- ▶ Easy & Clean Removability

## **IMPRESS YOUR CUSTOMERS**

With FLITE Technology<sup>®</sup> wrap films you save time and money, which allows you to lower the costs and offer more competitive pricing to your customers. Your customers will love the precise, vibrant graphics and when it comes to removing the film again you will love the easy and clean removability. The wrapping process will have increased efficiency and amongst other reduce the downtime of fleet which your clients will highly value!

## **MAXIMUM PRECISION**

No more frustration when the graphics need to be repositioned on the vehicle! Applied areas of FLITE Technology<sup>®</sup> wrap films can be lifted again and again for repositioning until the graphics are precisely in the right place! Once the graphics are in the right place they will stay put, even in deep channels and complex curves.

## **IT TAKES ONLY ONE**

The effortless removal of the liner of FLITE Technology<sup>®</sup> films reveals the light grey opaque adhesive. The adhesive is non-static, thus does not attract dust and enables to work with larger pieces of vinyls without fearing to get dust on the adhesive. As the squeegee smoothly slides over the vinyl, the wrinkles and bubbles can be pushed out with ease. The ease of application makes it possible for one wrapper to wrap a vehicle!

"Thanks to FLITE Technology<sup>®</sup> we can work faster because the film slides so easily over larger shapes. The application time is improved and really more efficient on large surfaces such as heavy trucks. On top of that, we see a superb print quality."

*Féroce Graphics, France*



# SLX<sup>®</sup>

## A PERFORMANCE EVOLUTION

EQUIPPED  
WITH

FLITE<sup>®</sup>  
TECHNOLOGY

### ALL-SEASON DIGITAL PRINT CAST FILM WITH OUTSTANDING FEATURES

VIBRANT AND RELIABLE PRINT QUALITY

IMPROVED CUTTING AND WEEDING

EFFORTLESS LINER RELEASE

HIGH-PERFORMANCE LINER

STATIC-FREE ADHESIVE CONSTRUCTION

ULTRA-REPOSITIONABLE

FAST ADHESIVE BOND

SUPERIOR DIMENSIONAL STABILITY

NO ADHESIVE TO ADHESIVE DELAMINATION


REMARKABLE RECOVERY PROPERTIES

OUTSTANDING HEAT RESISTANCE

STAYS IN DEEP CHANNELS

EXCELLENT BOND TO STAINLESS STEEL

FIRST IN CLASS CLEAN REMOVING

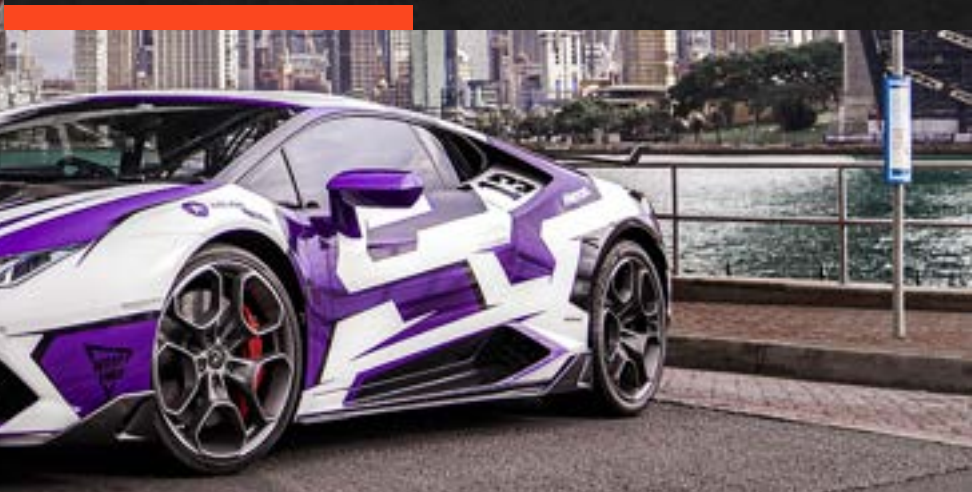

# PREMIUM COLOUR CHANGE



ARLON

FLITE<sup>®</sup>  
TECHNOLOGY

**Premium Colour Change** is your ideal choice for automotive restyling and fleet applications. The conformable cast film features FLITE Technology<sup>®</sup> for fast, easy installation, excellent repositioning and clean removability.

The engineered liner with invisible air channels gives bubble-free application resulting in an ultra-smooth finish for full and partial vehicle wraps. The specially adapted protective film on gloss colours ensures the highest gloss level. Guaranteed to stay down in deep channels, curves, recesses and the most complicated shapes.

**Premium Colour Change** eye-catching colours are available in **gloss, matte and satin finishes**.

## Ultra Gloss Levels



## Self-Healing Adhesive



Vehicles wrapped by [NeedForWraps.com](https://NeedForWraps.com)

# COLOUR *IN MOTION*



**403**  
*Gloss Black*



**401**  
*Gloss Red*



**411**  
*Gloss Silver  
Metallic*



**503**  
*Matte Black*



**551**  
*Matte  
Aluminium Red*



**412**  
*Gloss Light Grey*



**453**  
*Satin Black*



**554**  
*Matte Aluminium  
Black Rose*



**505**  
*Matte Grey*




**404**  
*Gloss Black  
Metallic*



**557**  
*Matte Aluminium  
Purple*



**413**  
*Gloss Grey*




**402**  
*Gloss White*



**408**  
*Gloss Blue Grey*



**558**  
*Matte Aluminium  
Grey*



**452**  
*Satin White*




**555**  
*Matte Aluminium  
Blue*



**454**  
*Satin Charcoal  
Metallic*



**455**  
*Satin  
Pearl White*




**405**  
*Gloss  
Pearl White*

## PLEASE NOTE:

To see the actual colours please use the physical Arlon Premium Colour Change swatch.



## Application Tips

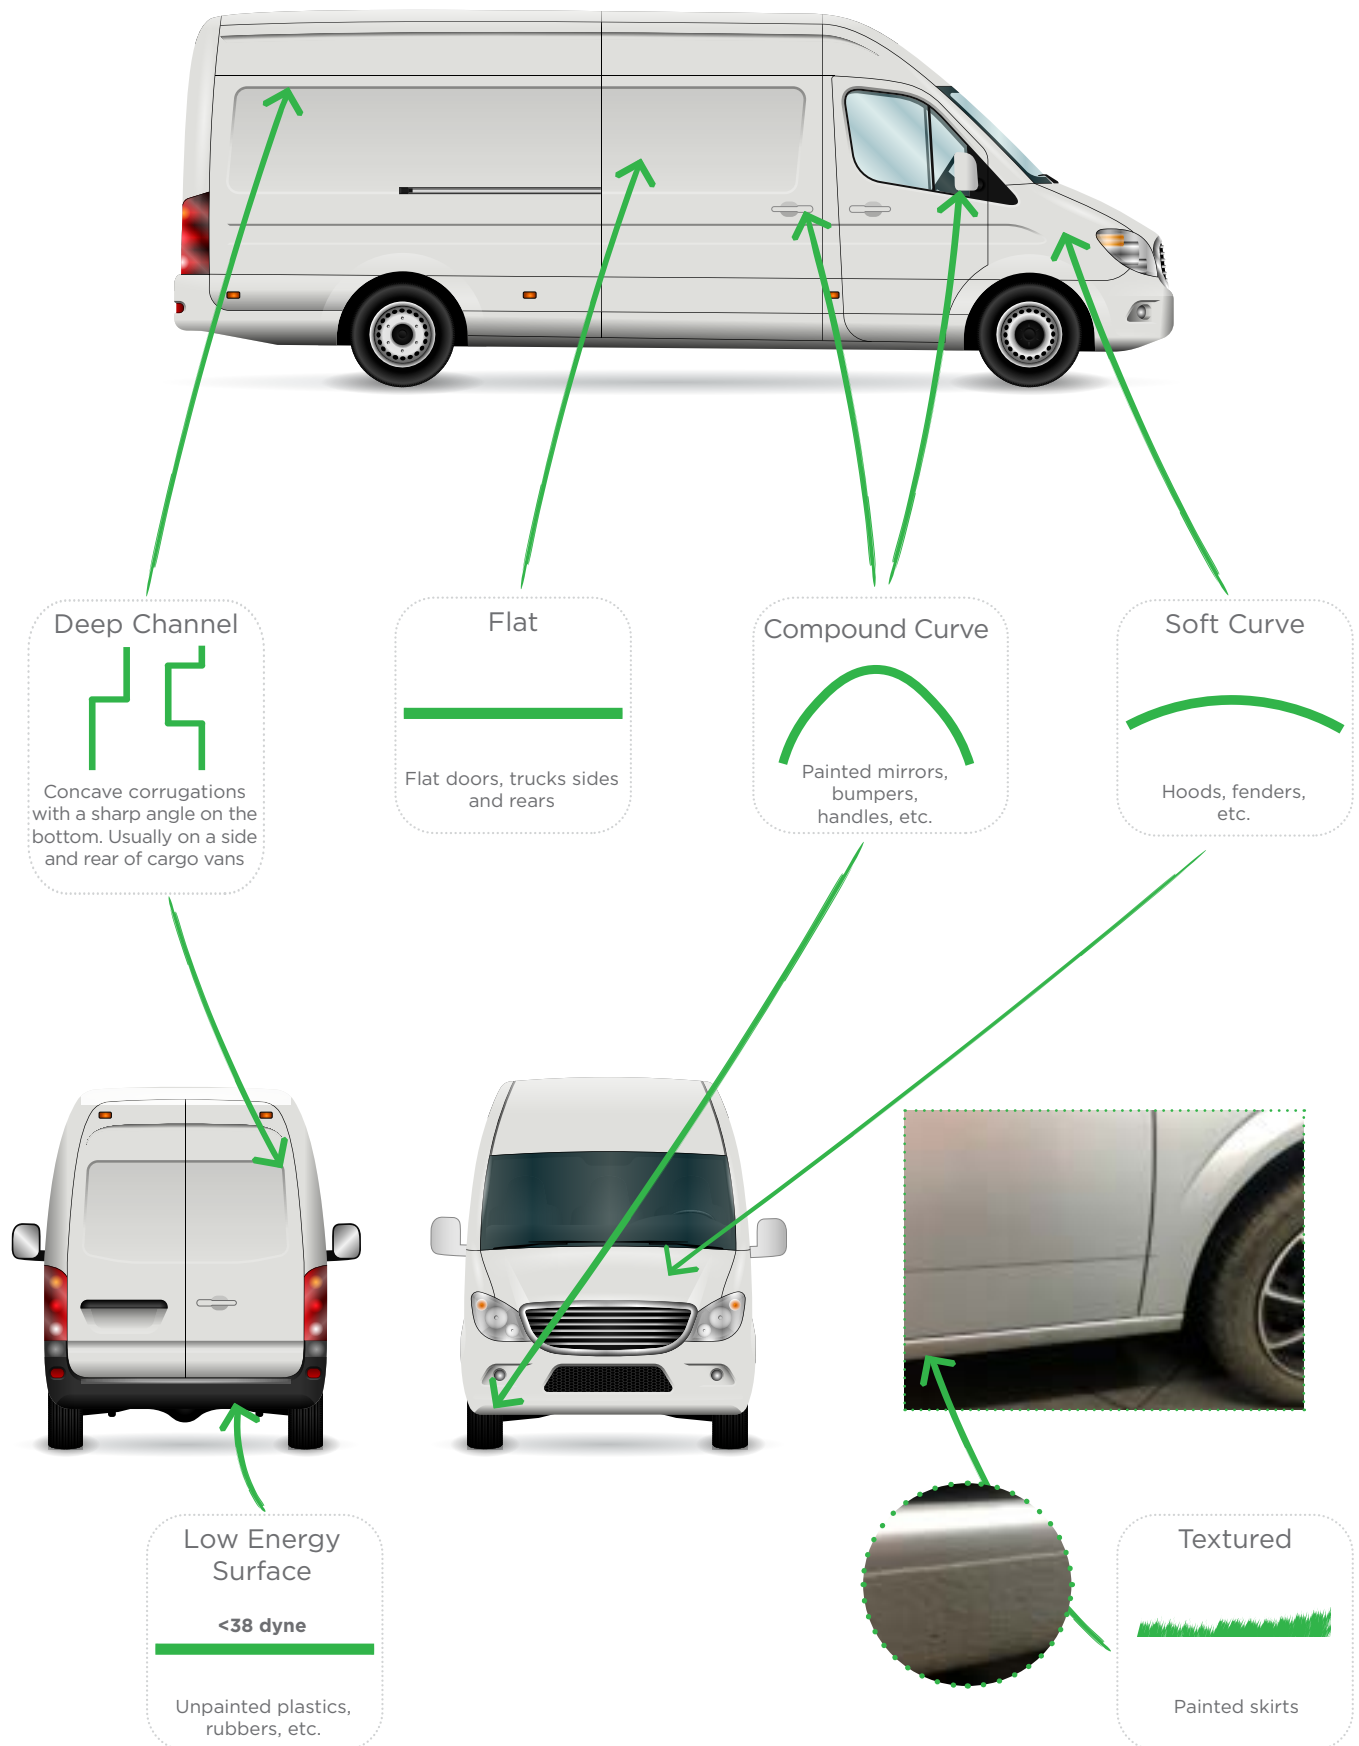

# Vehicle Categories



**Flat truck**

| Surfaces                                                                                                                                    | Recommended Products                                                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Without rivets: <ul style="list-style-type: none"> <li>• Flat panels on the sides and/or on the rear.</li> <li>• Smooth surfaces</li> </ul> | Premium Colour Change SLX+®<br>SLX™ Cast Wrap<br>DPF 6100XLP<br>DPF 6000XRP<br>DPF 6000RP WHITE / CLEAR<br>Fusion Wrap<br>DPF 4600GLX<br>DPF 2400XLP / DPF 2400<br>DPF 4550GTX/MTX<br>DPF 4550GT/MT<br>DPF 4550G |



**Car**

| Surfaces                                                                                        | Recommended Products                                                                                                                                      |
|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• No deep channels</li> <li>• Smooth surfaces</li> </ul> | Premium Colour Change SLX+®<br>SLX™ Cast Wrap<br>DPF 6100XLP<br>DPF 6000XRP<br>DPF 6000RP WHITE / CLEAR<br>Fusion Wrap<br>DPF 4600GLX<br>IllumiNITE Wrap™ |



**Cargo van**

| Surfaces                                                                                          | Recommended Products                                                                                    |
|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• Deep channels on the sides and/or on the rear</li> </ul> | Premium Colour Change SLX+®<br>SLX™ Cast Wrap<br>DPF 6100XLP<br>DPF 6000XRP<br>DPF 6000RP WHITE / CLEAR |



**Passenger van**

| Surfaces                                                                                                                | Recommended Products                                                                                                                                      |
|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• No deep channels</li> <li>• Windows on the sides and/or on the rear</li> </ul> | Premium Colour Change SLX+®<br>SLX™ Cast Wrap<br>DPF 6100XLP<br>DPF 6000XRP<br>DPF 6000RP WHITE / CLEAR<br>Fusion Wrap<br>DPF 4600GLX<br>IllumiNITE Wrap™ |



**Bus**

| Surfaces                                                                                        | Recommended Products                                                                                                                                      |
|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• No deep channels</li> <li>• Smooth surfaces</li> </ul> | Premium Colour Change SLX+®<br>SLX™ Cast Wrap<br>DPF 6100XLP<br>DPF 6000XRP<br>DPF 6000RP WHITE / CLEAR<br>Fusion Wrap<br>DPF 4600GLX<br>IllumiNITE Wrap™ |



**Train & Tram**

| Surfaces                                                                                        | Recommended Products                                                                                                                                      |
|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• No deep channels</li> <li>• Smooth surfaces</li> </ul> | Premium Colour Change SLX+®<br>SLX™ Cast Wrap<br>DPF 6100XLP<br>DPF 6000XRP<br>DPF 6000RP WHITE / CLEAR<br>Fusion Wrap<br>DPF 4600GLX<br>IllumiNITE Wrap™ |

## Choose your Vinyl

For more product  
information  
Scan the QR-Code



| NAME                                                       | DURABILITY UNPRINTED<br>(IN YEARS) | FILM |                           |        | ADHESIVE  |           |                |                 |            |             | SURFACES |             |                 |               |          |                     | APPLICATIONS                                                                     |
|------------------------------------------------------------|------------------------------------|------|---------------------------|--------|-----------|-----------|----------------|-----------------|------------|-------------|----------|-------------|-----------------|---------------|----------|---------------------|----------------------------------------------------------------------------------|
|                                                            |                                    | TYPE | THICKNESS<br>(IN MICRONS) | FINISH | PERMANENT | REMOVABLE | CLEAN REMOVING | HIGH/ULTRA TACK | AIR-EGRESS | COLOR       | FLAT     | SOFT CURVES | COMPOUND CURVES | DEEP CHANNELS | TEXTURED | LOW ENERGY SURFACES |                                                                                  |
| <b>PREMIUM COLOUR CHANGE</b><br><b>FLITE</b><br>TECHNOLOGY | 10                                 | C    | 76-84                     | G/M/S  | ●         |           | ●              |                 | ●          | G/C/<br>W/S | ●        | ●           | ●               | ●             | ●        |                     | Flat trucks<br>Cars<br>Cargo vans<br>Passenger vans<br>Buses<br>Trains - Trams   |
| <b>SLX+®</b><br><b>FLITE</b><br>TECHNOLOGY                 | 10                                 | C    | 50                        | G      | ●         |           | ●              |                 | ●          | LG          | ●        | ●           | ●               | ●             | ●        |                     | Flat trucks<br>Cars<br>Cargo vans<br>Passenger vans<br>Buses<br>Trains - Trams   |
| <b>SLX™ CAST WRAP</b><br><b>FLITE</b><br>TECHNOLOGY        | 10                                 | C    | 50                        | G      | ●         |           | ●              |                 | ●          | LG          | ●        | ●           | ●               | ●             | ●        |                     | Flat trucks<br>Cars<br>Cargo vans<br>Passenger vans<br>Buses<br>Trains - Trams   |
| <b>DPF 6100XLP</b><br><b>X-Scape®</b><br>TECHNOLOGY        | 10                                 | C    | 50                        | G      | ●         |           | ●              |                 | ●          | LG          | ●        | ●           | ●               | ●             | ●        |                     | Flat trucks<br>Cars<br>Cargo vans<br>Passenger vans<br>Buses<br>Trains - Trams   |
| <b>DPF 6000XRP</b><br><b>X-Scape®</b><br>TECHNOLOGY        | 10                                 | C    | 50                        | G      | ●         |           | ●              |                 | ●          | LG          | ●        | ●           | ●               | ●             | ●        |                     | Flat trucks<br>Cars<br>Cargo vans<br>Passenger vans<br>Buses<br>Trains - Trams   |
| <b>DPF 6000RP WHITE</b>                                    | 10                                 | C    | 50                        | G      | ●         |           | ●              |                 |            | LG          | ●        | ●           | ●               | ●             | ●        |                     | Flat trucks<br>Cars<br>Cargo vans<br>Passenger vans<br>Buses<br>Trains ▶ - Trams |
| <b>DPF 6000RP CLEAR</b>                                    | 7                                  | C    | 50                        | G      | ●         |           |                |                 |            | C           | ●        | ●           | ●               | ●             | ●        |                     | Flat trucks<br>Cars<br>Cargo vans<br>Passenger vans<br>Buses<br>Trains - Trams   |
| <b>FUSION WRAP</b><br><b>FLITE</b><br>TECHNOLOGY           | 7                                  | P    | 60                        | G      | ●         |           | ●              |                 | ●          | LG          | ●        | ●           | ●               |               | ●        |                     | Flat trucks<br>Cars<br>Passenger vans<br>Buses<br>Trains - Trams                 |

► Fire certification: Certified for Europe for rail external application in combination with Series 3350 - ▲ Only for flat trucks

● 5 years durability when used in combination with this lamination

| INK      |    |                                                                                     | SIZE                  |                        | RECOMMENDED OVERLAMINATES                                                                                              |
|----------|----|-------------------------------------------------------------------------------------|-----------------------|------------------------|------------------------------------------------------------------------------------------------------------------------|
| SOLVENTS | UV | LATEX                                                                               | ROLL WIDTH (IN METER) | ROLL LENGTH (IN METER) |                                                                                                                        |
|          |    |                                                                                     | 1.52                  | 25                     | N/A                                                                                                                    |
| •        | •  |    | 1.37<br>1.52          | 45.72                  | ★Series 3210<br>Series 3270<br>Series 3310<br>Series 3200<br>Series 3220<br>Series 3350                                |
| •        | •  |  | 1.37<br>1.52          | 45.72                  | ★Series 3270<br>★Series 3210<br>★Series 3310<br>Series 3200<br>Series 3220<br>Series 3350                              |
| •        | •  |  | 1.37<br>1.52          | 45.72                  | ★Series 3210<br>★Series 3220<br>★Series 3310<br>Series 3200<br>Series 3270<br>Series 3350                              |
| •        | •  |  | 1.37<br>1.52          | 45.72                  | ★Series 3210<br>★Series 3220<br>★Series 3310<br>Series 3200<br>Series 3270<br>Series 3350                              |
| •        | •  |  | 1.37<br>1.52          | 45.72                  | ★Series 3210<br>★Series 3220<br>★Series 3310<br>★Series 3350<br>Series 3200<br>Series 3270                             |
| •        | •  | •                                                                                   | 1.37<br>1.52          | 45.72                  | ★Series 3200<br>Series 3210<br>Series 3220<br>Series 3270<br>Series 3310                                               |
| •        | •  |  | 1.37<br>1.52          | 45.72                  | ★Series 3170<br>Series 3200<br>Series 3210<br>Series 3220<br>Series 3270<br>Series 3310<br>Series 3420▲<br>Series 3350 |

## WHEN TO USE FUSION WRAP AND WHEN TO USE ARLON CAST FILMS?

### Fusion Wrap

is designed for flat surfaces and many complicated shapes, but excluding deep channels. Fusion Wrap requires a relief cut when applied in deep channels.

### High-Performance Cast Films

(Premium Colour Change, SLX+®, SLX™ Cast Wrap, DPF 6100XLP, DPF 6000XRP, DPF 6000RP) are designed for flat and complicated shapes, including the most demanding channels.

| Fusion Wrap              | Vehicle Type                                                                          | ARLON Cast Films |
|--------------------------|---------------------------------------------------------------------------------------|------------------|
| ✓                        |  | ✓                |
| ✓                        |  | ✓                |
| ✗<br>Relief Cut Required |  | ✓                |
| ✗<br>Relief Cut Required |  | ✓                |
| ✓                        |  | ✓                |
| ✓                        |   | ✓                |

TURN THE  
PAGE FOR MORE  
**VEHICLE  
FILM PRODUCTS**



## Choose your Vinyl

For more product  
information  
Scan the QR-Code



| <div>For more product information<br/>Scan the QR-Code</div> <div></div>           | DURABILITY UNPRINTED<br>(IN YEARS) | FILM |                           |        | ADHESIVE  |           |                |                 |            |       | SURFACES |             |                 |               |          |                     | APPLICATIONS                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------|---------------------------|--------|-----------|-----------|----------------|-----------------|------------|-------|----------|-------------|-----------------|---------------|----------|---------------------|-------------------------------------------------------------------------------|
|                                                                                                                                                                    |                                    | TYPE | THICKNESS<br>(IN MICRONS) | FINISH | PERMANENT | REMOVABLE | CLEAN REMOVING | HIGH/ULTRA TACK | AIR-EGRESS | COLOR | FLAT     | SOFT CURVES | COMPOUND CURVES | DEEP CHANNELS | TEXTURED | LOW ENERGY SURFACES |                                                                               |
| NAME                                                                                                                                                               |                                    |      |                           |        |           |           |                |                 |            |       |          |             |                 |               |          |                     |                                                                               |
| <div>DPF 4600GLX</div> <div>X-Scape<sup>®</sup></div> <div>TECHNOLOGY</div>       | 7                                  | P    | 80                        | G      | ●         |           | ●              |                 | ●          | LG    | ●        | ●           | ●♣              |               |          |                     | Flat trucks<br>Cars<br>Passenger vans<br>Buses<br>Trains - Trams              |
| <div>ILLUMINITE WRAP™</div> <div>FLITE<sup>®</sup></div> <div>TECHNOLOGY</div>    | 7                                  | C    | 125                       | G      | ●         |           |                |                 | ●          | LG    | ●        | ●           | ●               |               |          |                     | Cars<br>Passenger vans<br>Buses<br>Trains - Trams                             |
| <div>DPF 2400XLP</div> <div>X-Scape<sup>®</sup></div> <div>TECHNOLOGY</div>     | 7                                  | C    | 125                       | G      | ●         |           |                |                 | ●          | LG    | ●        | ●           | ●               |               |          |                     | Flat trucks                                                                   |
| <div>DPF 2400</div>                                                                                                                                                | 7                                  | C    | 125                       | G      | ●         |           |                |                 |            | C     | ●        | ●           |                 |               |          |                     | Flat trucks                                                                   |
| <div>DPF 8000™ ULTRA TACK<br/>WHITE</div>                                                                                                                          | 7                                  | P    | 90                        | S      | ●         |           |                | ●               | ●■         | C     | ●        | ●           |                 |               | ●        | ●                   | ABS plastics<br>Off-road vehicles<br>Quads<br>Cross-Bikes<br>Machinery decals |
| <div>DPF 4550GTX/MTX</div> <div>X-Scape<sup>®</sup></div> <div>TECHNOLOGY</div> | 5                                  | P    | 70                        | G/M    | ●         |           |                |                 | ●          | LG    | ●        |             |                 |               | ●        | ●                   | Flat trucks                                                                   |
| <div>DPF 4550GT/MT</div>                                                                                                                                           | 5                                  | P    | 70                        | G/M    | ●         |           |                |                 |            | LG    | ●        |             |                 |               | ●        | ●                   | Flat trucks                                                                   |
| <div>DPF 4550G</div>                                                                                                                                               | 5                                  | P    | 70                        | G      | ●         |           |                |                 |            | C     | ●        |             |                 |               | ●        | ●                   | Flat trucks                                                                   |

♣ Only with lamination Series 3170 - ♠ Only for flat trucks - ● 5 years durability when used in combination with this lamination

■ Available for special order, please refer to your Arlon Business Development Manager - ◆ 1.02 & 1.24 m are only available in 99.94 m roll length, 1.37 & 1.52 m are only available in 45.72 m roll length

| INK      |    |                                                                                     | SIZE                             |                        | RECOMMENDED OVERLAMINATES                                                                                              |
|----------|----|-------------------------------------------------------------------------------------|----------------------------------|------------------------|------------------------------------------------------------------------------------------------------------------------|
| SOLVENTS | UV | LATEX                                                                               | ROLL WIDTH (IN METER)            | ROLL LENGTH (IN METER) |                                                                                                                        |
| •        | •  |    | 1.37<br>1.52                     | 45.72                  | ★Series 3170<br>Series 3200<br>Series 3210<br>Series 3220<br>Series 3270<br>Series 3310<br>Series 3420▲<br>Series 3350 |
| •        | •  |    | 1.22                             | 22.86<br>45.72         | ★Series 3200<br>★Series 3210<br>★Series 3220<br>Series 3270<br>Series 3310                                             |
| •        | •  |  | 1.22                             | 45.72                  | ★Series 3200<br>★Series 3210<br>★Series 3220<br>Series 3270<br>Series 3310                                             |
| •        |    |                                                                                     | 1.22                             | 45.72                  | ★Series 3200<br>★Series 3210<br>★Series 3220<br>Series 3270<br>Series 3310                                             |
| •        | •  |  | 1.02◆<br>1.24◆<br>1.37◆<br>1.52◆ | 45.72◆<br>99.94◆       | ★Series 3220<br>★Series 3420<br>★ProTec Series 3960<br>Series 3210<br>Series 3310<br>Series 3350                       |
| •        | •  | •                                                                                   | 1.07<br>1.37<br>1.52             | 50                     | ★Series 3450<br>Series 3170<br>Series 3200<br>Series 3210<br>Series 3220<br>Series 3310<br>Series 3350<br>Series 3420  |
| •        | •  | •                                                                                   | 1.07<br>1.37<br>1.52             | 50                     | ★Series 3450<br>Series 3170<br>Series 3200<br>Series 3210<br>Series 3220<br>Series 3310<br>Series 3350<br>Series 3420  |
| •        | •  | •                                                                                   | 1.07<br>1.37<br>1.52             | 50                     | ★Series 3450<br>Series 3170<br>Series 3200<br>Series 3210<br>Series 3220<br>Series 3310<br>Series 3350<br>Series 3420  |

## YOU MAY ALSO BE INTERESTED IN THE **FOLLOWING:**

PRO  TIPS

### Types of FILMS

Cast film begins as a liquid called organosol in which Polyvinyl Chloride (PVC) is suspended in a solvent mixture which exists as a liquid at room temperature.

This liquid is run under a knife which determines the thickness of the film and is then cast onto a liner which determines the surface gloss level or texture of the product. Then, the solvents are baked off leaving a solid PVC film behind.

Cast film has never been stressed or stretched, that is why it does not shrink in a way that polymeric/monomeric films do.

## WHAT IS **X-SCAPE TECHNOLOGY®?**

Arlon's brand name for our air-egress technology which allows air to release through tiny channels in the adhesive-backed vinyl used for fleet, vehicle and general signage applications. X-Scape Technology® allows installers to achieve a speedy installation while maintaining a high enough tack to ensure long-term bond.

**X-Scape®**  
TECHNOLOGY

# IMAGE GALLERY



SLX+®



SLX™ Cast Wrap By A1 Signs



DPF 6100XLP By Ultimate Car Wraps



DPF 6100XLP By Scholtensign



DPF 6000XRP By Art Graf



DPF 6000XRP



DPF 6000RP By Ei Media Poland



DPF 6000RP With Series 3350 For Rail Applications



Fusion Wrap



Premium Colour Change By NeedForWraps Poland



DPF 4600GLX By XquisitePrint UK



DPF 4600GLX By MovingAds Malta



IllumiNITE Wrap™



DPF 2400XLP



DPF 8000™ ULTRA TACK




DPF 4550GTX/MTX

# ARCHITECTURAL RANGE

The Arlon Architectural Range offers products for architects, interior designers and home décor experts. Designers looking for innovative but affordable solutions for renovations will find that Arlon's Architectural Range delivers exceptional quality and requires low maintenance, ultimately ensuring high design impact through versatile products.

The new range of products includes interior and exterior wall films as well as window graphics for residential and commercial projects.

INTERIOR WALLS  
EXTERIOR WALLS  
WINDOW FILMS  
FLOOR FILMS

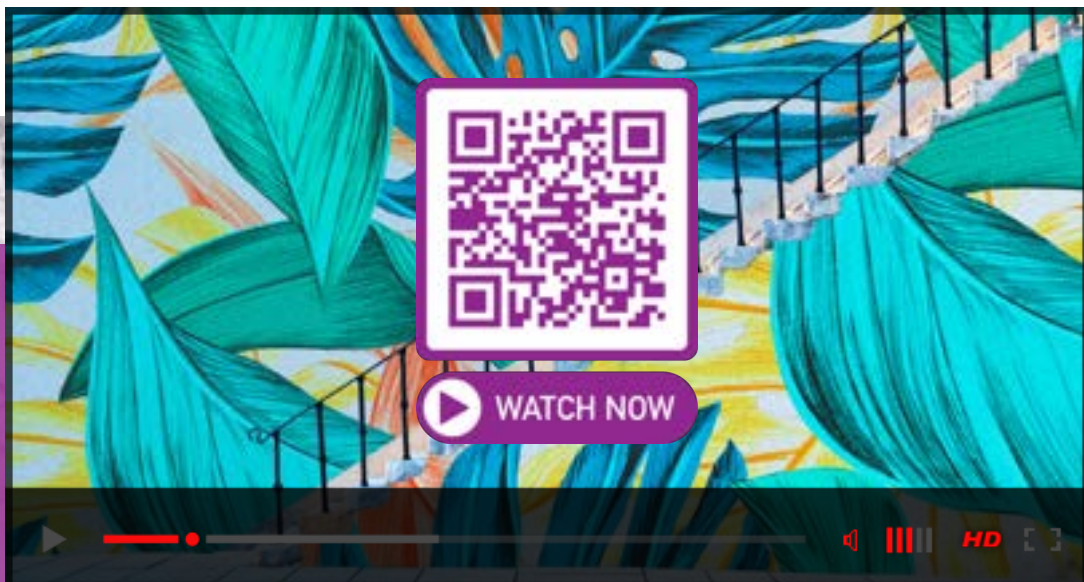

► Video: Arlon Architectural Range



# INTERIOR DECOR AND EXTERIOR FACADES REIMAGINED



# INTERIOR WALL FILMS

## Choose your Vinyl

For more product  
information  
Scan the QR-Code



| NAME               | DURABILITY UNPRINTED<br>(IN YEARS) | FILM |                           |        | ADHESIVE  |           |                |                 |            |       | SURFACES |             |          |                     | APPLICATIONS                                              |
|--------------------|------------------------------------|------|---------------------------|--------|-----------|-----------|----------------|-----------------|------------|-------|----------|-------------|----------|---------------------|-----------------------------------------------------------|
|                    |                                    | TYPE | THICKNESS<br>(IN MICRONS) | FINISH | PERMANENT | REMOVABLE | CLEAN REMOVING | HIGH/ULTRA TACK | AIR-EGRESS | COLOR | FLAT     | SOFT CURVES | TEXTURED | LOW ENERGY SURFACES |                                                           |
| DPF 4200▼          | 7                                  | P    | 150                       | M/C    | ●         |           | ●              |                 |            | C     | ●        | ●           | ●        |                     | Smooth painted/unpainted walls                            |
| DPF 4300           | 4                                  | P    | 86                        | M      |           | ●         | ●              |                 |            | C     | ●        |             |          |                     | Smooth painted walls                                      |
| DPF 510 ULTRA TACK | 3                                  | M    | 100                       | G/M    | ●         |           |                |                 |            | C     | ●        |             |          |                     | Smooth painted/unpainted walls<br>Tile<br>Plastic - Metal |

▼ Please refer to the Interior Walls Installation Guide



Flat


Painted wall  
Unpainted wall  
Metal - Plastic

Soft curve

Painted wall  
Unpainted wall  
Metal - Plastic

| INK      |    |                                                                                   | SIZE                  |                        | RECOMMENDED OVERLAMINATES                                                                  |
|----------|----|-----------------------------------------------------------------------------------|-----------------------|------------------------|--------------------------------------------------------------------------------------------|
| SOLVENTS | UV | LATEX                                                                             | ROLL WIDTH (IN METER) | ROLL LENGTH (IN METER) |                                                                                            |
| •        | •  |  | 1.37                  | 45.72                  | N/A                                                                                        |
| •        | •  | •                                                                                 | 1.37                  | 45.72                  | ★ Series 3350<br>★ Series 3420<br>Series 3170<br>Series 3210<br>Series 3220<br>Series 3310 |
| •        |    | •                                                                                 | 1.07<br>1.37<br>1.52  | 45.72                  | ★ Series 3510<br>Series 3170<br>Series 3420                                                |

Painted/  
Unpainted wall



Tile



Plastic



Metal



## FROM TEXTURED TO SMOOTH, **TRANSFORM YOUR WALLS**

YOU MAY ALSO  
BE INTERESTED IN THE  
**FOLLOWING:**

**WRAPITRIGHT®**

INSTRUCTIONAL VIDEO LIBRARY



**WATCH THE VIDEO ▶**

### Installing Large Interior Wall Graphics

Today, printed interior wall graphics are gradually taking over paint and wallpaper due to their ease of application and removal, customizability and even profitability. In this example, we are installing on a free-standing wall with no ceilings or adjacent walls. This wall is already clean. It is clear of spider webs, removable obstructions and is ready for application. Above all, use the right tools, media, preparation, and application technique. Certainly, this will ensure an efficient, safe, and profitable install.

This video will show you how to install large interior wall graphics.

For more videos, visit [wrapitright.com](http://wrapitright.com)

# EXTERIOR WALL FILMS

## Choose your Vinyl

For more product  
information  
Scan the QR-Code



| NAME                                                 | DURABILITY UNPRINTED<br>(IN YEARS) | FILM |                           |        | ADHESIVE  |           |                |                 |            |       | SURFACES |             |          |                     | APPLICATIONS                                                                                    |
|------------------------------------------------------|------------------------------------|------|---------------------------|--------|-----------|-----------|----------------|-----------------|------------|-------|----------|-------------|----------|---------------------|-------------------------------------------------------------------------------------------------|
|                                                      |                                    | TYPE | THICKNESS<br>(IN MICRONS) | FINISH | PERMANENT | REMOVABLE | CLEAN REMOVING | HIGH/ULTRA TACK | AIR-EGRESS | COLOR | FLAT     | SOFT CURVES | TEXTURED | LOW ENERGY SURFACES |                                                                                                 |
| DPF 8000™ ULTRA TACK<br>WHITE                        | 7                                  | P    | 90                        | S      | ●         |           |                | ●               | ●          | C     | ●        | ●           | ●        | ●                   | Brick<br>Concrete - Stucco<br>Tile<br>Wood<br>Smooth painted/unpainted walls<br>Plastic - Metal |
| DPF 8200 HIGH TACK                                   | 7                                  | P    | 90                        | S      | ●         |           |                | ●               |            | C     | ●        | ●           | ●        | ●                   | Brick - Concrete<br>Tile<br>Wood<br>Smooth painted/unpainted walls<br>Plastic - Metal           |
| DPF 8200X HIGH TACK<br><b>X-Scape®</b><br>TECHNOLOGY | 7                                  | P    | 90                        | S      | ●         |           |                | ●               | ●          | C     | ●        | ●           | ●        | ●                   | Brick - Concrete<br>Tile<br>Wood<br>Smooth painted/unpainted walls<br>Plastic - Metal           |

■ Available for special order, please refer to your Arlon Business Development Manager - ▲ Only for flat & smooth surfaces  
◆ 1.02 & 1.24 m are only available in 99.94 m roll length, 1.37 & 1.52 m are only available in 45.72 m roll length



Textured

Brick - Concrete  
Stucco - Wood  
Metal - Plastic - Tile

Low Energy

<38 dyne

Painted wall  
Plastic

# FROM TEXTURED TO SMOOTH, TRANSFORM YOUR WALLS

YOU MAY ALSO  
BE INTERESTED IN THE  
**FOLLOWING:**

| INK      |    |                                                                                    | SIZE                                 |                           | RECOMMENDED<br>OVERLAMINATES                                                  |
|----------|----|------------------------------------------------------------------------------------|--------------------------------------|---------------------------|-------------------------------------------------------------------------------|
| SOLVENTS | UV | LATEX                                                                              | ROLL WIDTH<br>(IN METER)             | ROLL LENGTH<br>(IN METER) |                                                                               |
| •        | •  |   | 1.02 ♦<br>1.24 ♦<br>1.37 ♦<br>1.52 ♦ | 99.94 ♦<br>45.72 ♦        | ★ Series 3220<br>★ Series 3420 ▲<br>Series 3210<br>Series 3310<br>Series 3350 |
| •        | •  |   | 1.37<br>1.52                         | 45.72                     | ★ Series 3220<br>★ Series 3420 ▲<br>Series 3210<br>Series 3310<br>Series 3350 |
| •        | •  |  | 1.37<br>1.52                         | 45.72                     | ★ Series 3220<br>★ Series 3420 ▲<br>Series 3210<br>Series 3310<br>Series 3350 |

Brick



Plastic



Concrete




Tile



Stucco



Painted/  
Unpainted wall



Wood




Metal



## WRAPITRIGHT®

INSTRUCTIONAL VIDEO LIBRARY

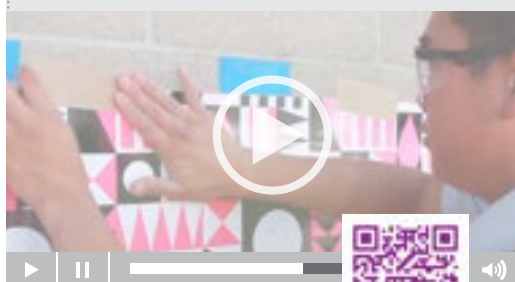

WATCH THE VIDEO ►

### Installing Large Exterior Wall Graphics

Applying exterior wall graphics presents significantly greater challenges than interior walls. Exterior walls present more options in their construction: materials such as concrete, brick, or stucco; textures which range from smooth to extremely textured; and finishes from primed to painted to bare.

Digitally printed exterior wall graphics can achieve amazing results that paint simply cannot. So to maintain and improve the appearance of printed wall graphics, wrap it right the first time, on time, every time.

This video will show you how to installing large exterior wall graphics.

For more videos, visit [wrapitright.com](http://wrapitright.com)

## Choose your Vinyl

For more product information  
Scan the QR-Code



| NAME           | DURABILITY UNPRINTED<br>(IN YEARS) | FILM |                           |        | ADHESIVE  |           |                |                 |            |       | SURFACES |             |          |                     |        |         | APPLICATIONS                          |
|----------------|------------------------------------|------|---------------------------|--------|-----------|-----------|----------------|-----------------|------------|-------|----------|-------------|----------|---------------------|--------|---------|---------------------------------------|
|                |                                    | TYPE | THICKNESS<br>(IN MICRONS) | FINISH | PERMANENT | REMOVABLE | CLEAN REMOVING | HIGH/ULTRA TACK | AIR-EGRESS | COLOR | FLAT     | SOFT CURVES | TEXTURED | LOW ENERGY SURFACES | INDOOR | OUTDOOR |                                       |
| SERIES 5400    | 5/<br>2▼                           | P    | 80                        | M      | ●         |           |                |                 |            | C     | ●        |             |          |                     | ●      | ●       | Windows<br>Mirrors<br>Partitions      |
| DPF 5200       | 7                                  | C    | 50                        | M      | ●         |           |                |                 |            | C     | ●        |             |          |                     | ●      | ●       | Windows<br>Mirrors<br>Partitions      |
| DPF 50WD WHITE | 2                                  | P    | 90                        | M      |           | ●         | ●              |                 |            | C     | ●        |             |          |                     | ●      | ●       | Windows<br>Glass<br>Metal - Aluminium |
| DPF 50WD CLEAR | 2/1                                | P    | 100                       | G      |           | ●         | ●              |                 |            | C     | ●        |             |          |                     | ●      | ●       | Windows<br>Glass<br>Metal - Aluminium |
| DPF 45WF♣      | 1                                  | M    | 150                       | S      |           |           | ●              |                 |            | C     | ●        |             |          |                     | ●      | ●       | Windows<br>Glass                      |

▼ Years durability for outdoor applications - ♣ One way vision 60/40 perforated pattern - ◆ Optimal printing on HP Latex 360

## WHAT IS AN ETCHED GLASS FILM? **SERIES 5400** **DPF 5200**

Arlon's Etched Glass vinyl is designed to simulate the look of a fine grain acid etched or a sandblasted glass finish. It eliminates the mess, expense, inconsistency and possible damage to costly glass that these traditional methods can cause.

It may be used on an inner (second surface) or outer layer (first surface) of glass, acrylic or polycarbonate substrates. The most common use is on second-surface applications, as it helps avoid abrasion and damage due to vandalism.

Arlon's Etched Glass vinyl is also preferred when a uniform, high-gloss surface over the entire sign is required.



| INK      |     |       | SIZE                  |                        | RECOMMENDED OVERLAMINATES   |
|----------|-----|-------|-----------------------|------------------------|-----------------------------|
| SOLVENTS | UV  | LATEX | ROLL WIDTH (IN METER) | ROLL LENGTH (IN METER) |                             |
| N/A      | N/A | N/A   | 1.22<br>1.52          | 50                     | N/A                         |
| ●        | ●   | ●     | 1.22<br>1.52          | 45.72                  | N/A                         |
| ●        | ●   | ●     | 1.37                  | 45.72                  | ★Series 3420                |
| ●        | ●   |       | 1.37                  | 45.72                  | ★Series 3200<br>Series 3420 |
| ●        | ●   | ●◆    | 1.37<br>1.52          | 50                     | ★Series 3200                |

TRANSFORM  
ORDINARY WINDOWS INTO  
**PERSONALIZED  
ART-TAILORED**

YOU MAY ALSO  
BE INTERESTED IN THE  
**FOLLOWING:**

**WRAPITRIGHT®**  
 INSTRUCTIONAL VIDEO LIBRARY





**WATCH THE VIDEO ▶**  
**Wet Application of a Window Graphic**  
 Using a wet application can help make your project picture perfect. This video demonstrates how to correctly install window graphics with a wet application.  
 For more videos, visit [wrapitright.com](https://wrapitright.com)

## Choose your Vinyl

For more product  
information  
Scan the QR-Code



| For more product information<br>Scan the QR-Code |  | DURABILITY UNPRINTED<br>(IN YEARS) | FILM |                           |        | ADHESIVE  |           |                |                 |            | SURFACES |      |             |          |                     |        | APPLICATIONS |                                                                                                                                  |
|--------------------------------------------------|--|------------------------------------|------|---------------------------|--------|-----------|-----------|----------------|-----------------|------------|----------|------|-------------|----------|---------------------|--------|--------------|----------------------------------------------------------------------------------------------------------------------------------|
| NAME                                             |  |                                    | TYPE | THICKNESS<br>(IN MICRONS) | FINISH | PERMANENT | REMOVABLE | CLEAN REMOVING | HIGH/ULTRA TACK | AIR-EGRESS | COLOR    | FLAT | SOFT CURVES | TEXTURED | LOW ENERGY SURFACES | INDOOR |              | OUTDOOR                                                                                                                          |
| DPF 8200 HIGH TACK                               |  | 7                                  | P    | 90                        | S      | ●         |           |                | ●               |            | C        | ●    | ●           | ●        | ●                   | ●      |              | Low-pile carpet<br>Smooth floors<br>Sealed concrete<br>Ceramic tile<br>Waxed vinyl flooring<br>Sealed wood<br>Marble<br>Terrazzo |
| DPF 8000™ ULTRA TACK                             |  | 7                                  | P    | 90                        | S      | ●         |           |                | ●               | ■          | C        | ●    | ●           | ●        | ●                   | ●      |              | Smooth floors<br>Sealed concrete<br>Ceramic tile<br>Waxed vinyl flooring<br>Sealed wood<br>Marble<br>Terrazzo                    |
| DPF 4600GLX<br>X-Scape®<br>TECHNOLOGY            |  | 7                                  | P    | 80                        | G      | ●         |           | ●              |                 | ●          | LG       | ●    | ●           | ●        | ■                   |        |              | Smooth floors<br>Sealed concrete<br>Ceramic tile<br>Waxed vinyl flooring<br>Sealed wood<br>Marble<br>Terrazzo                    |
| DPF 510 ULTRA TACK                               |  | 3                                  | M    | 100                       | G/M    | ●         |           |                |                 |            | C        | ●    |             |          |                     | ●      |              | Smooth floors<br>Sealed concrete<br>Ceramic tile<br>Waxed vinyl flooring<br>Sealed wood<br>Marble<br>Terrazzo                    |
| DPF 510GT/MT                                     |  | 3                                  | M    | 100                       | G/M    | ●         |           |                |                 |            | LG       | ●    |             |          |                     | ●      |              | Smooth floors<br>Sealed concrete<br>Ceramic tile<br>Waxed vinyl flooring<br>Sealed wood<br>Marble<br>Terrazzo                    |
| DPF 510GTR/MTR                                   |  | 3                                  | M    | 100                       | G/M    |           | ●         |                |                 |            | LG       | ●    |             |          |                     | ●      |              | Smooth floors<br>Sealed concrete<br>Ceramic tile<br>Waxed vinyl flooring<br>Sealed wood<br>Marble<br>Terrazzo                    |

■ Available for special order, please refer to your Arlon Business Development Manager  
◆ 1.02 & 1.24 m are only available in 99.94 m roll length, 1.37 & 1.52 m are only available in 45.72 m roll length


| INK      |    |                                                                                     | SIZE                                 |                        | RECOMMENDED OVERLAMINATES                         |
|----------|----|-------------------------------------------------------------------------------------|--------------------------------------|------------------------|---------------------------------------------------|
| SOLVENTS | UV | LATEX                                                                               | ROLL WIDTH (IN METER)                | ROLL LENGTH (IN METER) |                                                   |
| •        | •  |    | 1.37<br>1.52                         | 45.72                  | ★Series 3420 Gloss or Matte<br>★Series 3220 Gloss |
| •        | •  |    | 1.02 ♦<br>1.24 ♦<br>1.37 ♦<br>1.52 ♦ | 99.94 ♦<br>45.72 ♦     | ★Series 3420 Gloss or Matte<br>★Series 3220 Gloss |
| •        | •  |  | 1.37<br>1.52                         | 45.72                  | ★Series 3420 Gloss or Matte<br>★Series 3220 Gloss |
| •        |    | •                                                                                   | 1.07<br>1.37<br>1.52                 | 45.72                  | ★Series 3510 Matte                                |
| •        |    | •                                                                                   | 1.07<br>1.37<br>1.52                 | 45.72                  | ★Series 3510 Matte                                |
| •        |    | •                                                                                   | 1.07<br>1.37<br>1.52                 | 45.72                  | ★Series 3510 Matte                                |

QUALITY IS AT THE CORE  
OF EVERYTHING WE DO -  
**OUR PRODUCTS  
REFLECT THIS**

YOU MAY ALSO  
BE INTERESTED IN THE  
**FOLLOWING:**

## WRAPITRIGHT®

INSTRUCTIONAL VIDEO LIBRARY

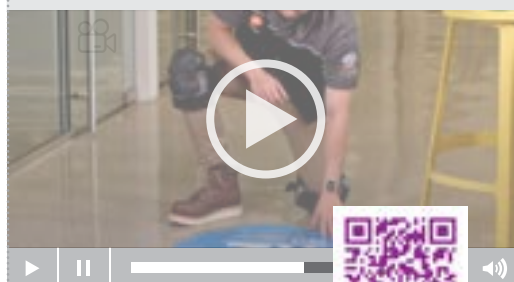

**WATCH THE VIDEO ▶**

### How to Install Floor Graphics

Vinyl floor graphics are a great way to direct traffic, show-off your brand, and promote an event. To learn how to install floor graphics follow along with the steps in this video.

For more videos, visit [wrapitright.com](http://wrapitright.com)

## DPF 8200 HIGH TACK

IS PERFECT FOR YOUR  
LOW-PILE CARPETS



# IMAGE GALLERY



DPF 4200 CANVAS



DPF 4300



DPF 510  
ULTRA TACK



DPF 8000™  
ULTRA TACK WHITE



DPF 8200 HIGH TACK



DPF 8200X HIGH TACK





# JOAN Miró

PAINTING AND

ANTI-PAINTING 1927-19

## Choose your Vinyl

For more product  
information  
Scan the QR-Code



| For more product information<br>Scan the QR-Code                                                         |  | DURABILITY UNPRINTED<br>(IN YEARS) | FILM |                           |        | ADHESIVE  |           |                |                 |            | SURFACES |      |             |          |                     | APPLICATIONS |        |                                    |
|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|------------------------------------|------|---------------------------|--------|-----------|-----------|----------------|-----------------|------------|----------|------|-------------|----------|---------------------|--------------|--------|------------------------------------|
|                                                                                                          |                                                                                  |                                    | TYPE | THICKNESS<br>(IN MICRONS) | FINISH | PERMANENT | REMOVABLE | CLEAN REMOVING | HIGH/ULTRA TACK | AIR-EGRESS | COLOR    | FLAT | SOFT CURVES | TEXTURED | LOW ENERGY SURFACES |              | INDOOR | OUTDOOR                            |
| NAME                                                                                                     |                                                                                  |                                    |      |                           |        |           |           |                |                 |            |          |      |             |          |                     |              |        |                                    |
| DPF 8000™ ULTRA TACK WHITE                                                                               |                                                                                  | 7                                  | P    | 90                        | S      | ●         |           |                | ●               | ■          | C        | ●    | ●           | ●        | ●                   | ●            | ●      | ABS plastic<br>General signage     |
| DPF 8000™ ULTRA TACK CLEAR                                                                               |                                                                                  | 7                                  | P    | 75                        | L      | ●         |           |                | ●               |            | C        | ●    | ●           | ●        | ●                   | ●            | ●      | ABS plastic<br>General signage     |
| DPF 8200X HIGH TACK<br> |                                                                                  | 7                                  | P    | 90                        | S      | ●         |           |                | ●               | ●          | C        | ●    | ●           | ●        | ●                   | ●            | ●      | General signage<br>Decals          |
| DPF 8200 HIGH TACK                                                                                       |                                                                                  | 7                                  | P    | 90                        | S      | ●         |           |                | ●               |            | C        | ●    | ●           | ●        | ●                   | ●            | ●      | General signage<br>Decals          |
| DPF 6000XRP<br>       |                                                                                  | 10                                 | C    | 50                        | G      | ●         |           | ●              |                 | ●          | LG       | ●    | ●           | ●        |                     | ●            | ●      | General signage                    |
| DPF 6000RP WHITE                                                                                         |                                                                                  | 10                                 | C    | 50                        | G      | ●         |           | ●              |                 |            | LG       | ●    | ●           | ●        |                     | ●            | ●      | General signage                    |
| DPF 6000RP CLEAR                                                                                         |                                                                                  | 7                                  | C    | 50                        | G      | ●         |           |                |                 |            | C        | ●    | ●           | ●        |                     | ●            | ●      | Backlit signage<br>General signage |
| DPF 4600GLX<br>       |                                                                                  | 7                                  | P    | 80                        | G      | ●         |           |                |                 | ●          | LG       | ●    | ●           |          |                     | ●            | ●      | General signage                    |
| DPF 2400                                                                                                 |                                                                                  | 7                                  | C    | 125                       | G      | ●         |           |                |                 |            | C        | ●    | ●           |          |                     | ●            | ●      | General signage                    |

◆ 1.02 & 1.24 m are only available in 99.94 m roll length, 1.37 & 1.52 m are only available in 45.72 m roll length

■ Available for special order, please refer to your Arlon Business Development Manager

♣ 1.24 m is only available in 99.94 m roll length, 1.37 m is only available in 45.72 m roll length

▲ Only for flat & smooth surfaces ● 5 years durability when used in combination with this lamination


| INK      |    |                                                                                     | SIZE                                 |                        | RECOMMENDED OVERLAMINATES                                                                                                |
|----------|----|-------------------------------------------------------------------------------------|--------------------------------------|------------------------|--------------------------------------------------------------------------------------------------------------------------|
| SOLVENTS | UV | LATEX                                                                               | ROLL WIDTH (IN METER)                | ROLL LENGTH (IN METER) |                                                                                                                          |
| •        | •  |    | 1.02 ♦<br>1.24 ♦<br>1.37 ♦<br>1.52 ♦ | 99.94 ♦<br>45.72 ♦     | ★ Series 3220<br>★ Series 3420<br>★ ProTec Series 3960<br>Series 3210<br>Series 3310<br>Series 3350                      |
| •        | •  | •                                                                                   | 1.24 ♣<br>1.37 ♣                     | 99.94 ♣<br>45.72 ♣     | ★ Series 3200                                                                                                            |
| •        | •  |    | 1.37<br>1.52                         | 45.72                  | ★ Series 3220<br>★ Series 3420<br>★ ProTec Series 3960<br>Series 3210<br>Series 3310<br>Series 3350                      |
| •        | •  |   | 1.37<br>1.52                         | 45.72                  | ★ Series 3220<br>★ Series 3420<br>★ ProTec Series 3960<br>Series 3210<br>Series 3310<br>Series 3350                      |
| •        | •  |  | 1.37<br>1.52                         | 45.72                  | ★ Series 3210<br>★ Series 3220<br>★ Series 3310<br>Series 3200<br>Series 3270<br>Series 3350                             |
| •        | •  |  | 1.37<br>1.52                         | 45.72                  | ★ Series 3210<br>★ Series 3220<br>★ Series 3310<br>★ Series 3350<br>Series 3200<br>Series 3270                           |
| •        | •  | •                                                                                   | 1.37<br>1.52                         | 45.72                  | ★ Series 3200<br>Series 3210<br>Series 3220<br>Series 3270<br>Series 3310                                                |
| •        | •  |  | 1.37<br>1.52                         | 45.72                  | ★ Series 3170<br>Series 3200<br>Series 3210<br>Series 3220<br>Series 3270<br>Series 3310<br>Series 3420 ▲<br>Series 3350 |
| •        |    |                                                                                     | 1.22                                 | 45.72                  | ★ Series 3200<br>★ Series 3210<br>★ Series 3220<br>Series 3270<br>Series 3310                                            |

YOU MAY ALSO  
BE INTERESTED IN THE  
**FOLLOWING:**

## WRAPITRIGHT®



INSTRUCTIONAL VIDEO LIBRARY

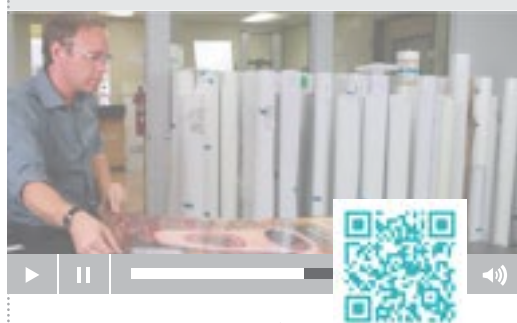

WATCH THE VIDEO ►

### Flat Substrate Application

At some point in time, you are going to run into a situation where you are going to have to lay out a large graphic by hand onto a flat substrate. When using the proper tools and air egress vinyl, it is going to make your life so much easier.

The flat substrate used in this demonstration is a big aluminium panel – one of the most aggressive surfaces on which to lay a graphic. Before beginning the application, make sure your graphic is the proper size for your substrate, including a little extra on all edges for trimming. This video shows how you can use air-egress vinyl to make these application projects simple and consistent.

For more videos, visit [wrapitright.com](http://wrapitright.com)

TURN THE  
PAGE FOR MORE  
**COMMERCIAL  
FILM  
PRODUCTS**



## Choose your Vinyl

For more product  
information  
Scan the QR-Code



For more product information  
Scan the QR-Code



| NAME                                                                                                 | DURABILITY UNPRINTED<br>(IN YEARS) | FILM |                           |        | ADHESIVE  |           |                |                 |            |         | SURFACES |             |          |                     |        |         | APPLICATIONS                                                       |
|------------------------------------------------------------------------------------------------------|------------------------------------|------|---------------------------|--------|-----------|-----------|----------------|-----------------|------------|---------|----------|-------------|----------|---------------------|--------|---------|--------------------------------------------------------------------|
|                                                                                                      |                                    | TYPE | THICKNESS<br>(IN MICRONS) | FINISH | PERMANENT | REMOVABLE | CLEAN REMOVING | HIGH/ULTRA TACK | AIR-EGRESS | COLOR   | FLAT     | SOFT CURVES | TEXTURED | LOW ENERGY SURFACES | INDOOR | OUTDOOR |                                                                    |
| DPF 4550GTX/MTX<br> | 5                                  | P    | 70                        | G/M    | ●         |           |                |                 | ●          | LG      | ●        |             |          |                     | ●      | ●       | General signage                                                    |
| DPF 4550GT/MT                                                                                        | 5                                  | P    | 70                        | G/M    | ●         |           |                |                 |            | LG      | ●        |             |          |                     | ●      | ●       | General signage                                                    |
| DPF 4550G                                                                                            | 5                                  | P    | 70                        | G      | ●         |           |                |                 |            | C       | ●        |             |          |                     | ●      | ●       | General signage                                                    |
| DPF 4300                                                                                             | 4                                  | P    | 86                        | M      |           | ●         | ●              |                 |            | C       | ●        |             |          |                     | ●      | ●       | General signage<br>Medium-term signage<br>Decals                   |
| DPF 510 ULTRA TACK                                                                                   | 3                                  | M    | 100                       | G/M    | ●         |           |                | ●               |            | C<br>LG | ●        |             |          |                     | ●      | ●       | Short-term signage<br>POP display<br>Kiosk                         |
| DPF 510G/M                                                                                           | 3                                  | M    | 100                       | G/M    | ●         |           |                |                 |            | C       | ●        |             |          |                     | ●      | ●       | Medium-term signage<br>POP display<br>Kiosk<br>Real estate signage |
| DPF 510GT/MT                                                                                         | 3                                  | M    | 100                       | G/M    | ●         |           |                |                 |            | LG      | ●        |             |          |                     | ●      | ●       | Medium-term signage<br>POP display<br>Kiosk<br>Real estate signage |
| DPF 510GTR/MTR                                                                                       | 3                                  | M    | 100                       | G/M    |           | ●         |                |                 |            | LG      | ●        |             |          |                     | ●      | ●       | Short-term signage<br>POP display<br>Kiosk                         |

| INK      |    |       | SIZE                  |                        | RECOMMENDED OVERLAMINATES                                                                                             |
|----------|----|-------|-----------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------|
| SOLVENTS | UV | LATEX | ROLL WIDTH (IN METER) | ROLL LENGTH (IN METER) |                                                                                                                       |
| •        | •  | •     | 1.07<br>1.37<br>1.52  | 50                     | ★Series 3450<br>Series 3170<br>Series 3200<br>Series 3210<br>Series 3220<br>Series 3310<br>Series 3350<br>Series 3420 |
| •        | •  | •     | 1.07<br>1.37<br>1.52  | 50                     | ★Series 3450<br>Series 3170<br>Series 3200<br>Series 3210<br>Series 3220<br>Series 3310<br>Series 3350<br>Series 3420 |
| •        | •  | •     | 1.07<br>1.37<br>1.52  | 50                     | ★Series 3450<br>Series 3170<br>Series 3200<br>Series 3210<br>Series 3220<br>Series 3310<br>Series 3350<br>Series 3420 |
| •        | •  | •     | 1.37                  | 45.72                  | ★Series 3350<br>★Series 3420<br>Series 3170<br>Series 3210<br>Series 3220<br>Series 3310                              |
| •        |    | •     | 1.07<br>1.37<br>1.52  | 45.72                  | ★Series 3510<br>Series 3170<br>Series 3420                                                                            |
| •        |    | •     | 1.07<br>1.37<br>1.52  | 45.72                  | ★Series 3510<br>Series 3170<br>Series 3420                                                                            |
| •        |    | •     | 1.07<br>1.37<br>1.52  | 45.72                  | ★Series 3510<br>Series 3170<br>Series 3420                                                                            |
| •        |    | •     | 1.07<br>1.37<br>1.52  | 45.72                  | ★Series 3510<br>Series 3170<br>Series 3420                                                                            |

PRO

TIPS

## Types of FILMS

Polymeric and monomeric films are perfect for short-term and medium-term graphics including temporary signage, indoor graphics and billboards.



# IMAGE GALLERY



DPF 8000™ ULTRA  
TACK WHITE



DPF 8000™ ULTRA  
TACK CLEAR



DPF 8200X HIGH TACK



DPF 6000XRP



DPF 6000RP WHITE



DPF 6000RP CLEAR



DPF 4600GLX



DPF 2400



DPF 4550  
GTX/MTX



DPF 4550G/M



DPF 4300



DPF 510GT/MT

## Choose your Overlamine

For more product information  
Scan the QR-Code



| NAME                        | DURABILITY UNPRINTED (IN YEARS) | FILM |                        |        | RELEASE LINER       | SIZE                  |                        | RECOMMENDED VINYL |                |             |             |                  |                  |             |             |
|-----------------------------|---------------------------------|------|------------------------|--------|---------------------|-----------------------|------------------------|-------------------|----------------|-------------|-------------|------------------|------------------|-------------|-------------|
|                             |                                 | TYPE | THICKNESS (IN MICRONS) | FINISH |                     | ROLL WIDTH (IN METER) | ROLL LENGTH (IN METER) | SLX+*             | SLX™ CAST WRAP | DPF 6100XLP | DPF 6000XRP | DPF 6000RP WHITE | DPF 6000RP CLEAR | FUSION WRAP | DPF 4600GLX |
| SERIES 3170                 | 7                               | C    | 35                     | G      | Clay Coated         | 1.37<br>1.52          | 45.72                  |                   |                |             |             |                  |                  | ★           | ★           |
| SERIES 3200                 | 7                               | C    | 50                     | G      | Clear Synthetic     | 1.37<br>1.52          | 45.72                  | •                 | •              | •           | •           | •                | ★                | •           | •           |
| SERIES 3210                 | 7                               | C    | 35                     | G      | Clay Coated         | 1.22<br>1.37<br>1.52  | 45.72                  | ★                 | ★              | ★           | ★           | ★                | •                | •           | •           |
| SERIES 3220                 | 7                               | C    | 50                     | G/M    | Clay Coated         | 1.22▼<br>1.37<br>1.52 | 45.72                  | •                 | •              | ★           | ★           | ★                | •                | •           | •           |
| SERIES 3270                 | 7                               | C    | 50                     | G/M    | Clay Coated         | 1.37<br>1.52          | 45.72                  | •                 | ★              | •           | •           | •                | •                | •           | •           |
| SERIES 3310 🌱*              | 10                              | PU   | 38                     | G      | Clay Coated         | 1.37<br>1.52          | 45.72                  | •                 | ★              | ★           | ★           | ★                | •                | •           | •           |
| SERIES 3420                 | 5                               | P    | 75                     | G/M/S  | Clay Coated         | 1.07▼<br>1.37<br>1.52 | 45.72                  |                   |                |             |             |                  |                  | •▲          | •▲          |
| SERIES 3450                 | 5                               | P    | 80                     | G/M    | Clay Coated         | 1.07▼<br>1.37<br>1.52 | 50                     |                   |                |             |             |                  |                  |             |             |
| SERIES 3510                 | 3                               | M    | 80                     | G/M    | Polycoated Kraft    | 1.37<br>1.52          | 45.72                  |                   |                |             |             |                  |                  |             |             |
| SERIES 3350 ANTI-GRAFFITI ▶ | 10                              | PVDF | 50                     | S      | Lay-Flat Polycoated | 1.37                  | 45.72                  | •                 | •              | •           | •           | ★                |                  | •           | •           |
| PROTEC SERIES 3960          | 2                               | M    | 305                    | G      | Clear Synthetic     | 1.37                  | 22.86                  |                   |                |             |             |                  |                  |             |             |

★ : Recommended overlamine: Recommended to use for primary application  
 • : Compatible overlamine: Can be used as a secondary or alternative application  
 ▼ Only available in Gloss Finish - 🌱 Environmentally Friendly - \* Recommended for fleet and vehicle applications  
 ▲ Only for flat surfaces - • 5 years durability when used in combination with this lamination - ▶ Compatible with all Arlon vinyl films used only for flat & smooth surfaces applications

ARLON OVERLAMINATES  
ARE DESIGNED TO  
**PROTECT &  
PROLONG THE LIFE  
OF YOUR GRAPHIC**

PRO  TIPS

### Types of OVERLAMINATES


The overlamine must be the same or higher quality than the digital film.  
If you choose a cast vinyl, choose a cast lamination. Your work will be protected in the best way.

| ILLUMINITE WRAP™ | DPF 2400XLP | DPF 2400 | DPF 8000 ULTRA TACK WHITE | DPF 4550GTX/MTX | DPF 4550GT/MT | DPF 4550G | DPF 4300 | DPF 510 ULTRA TACK | DPF 8200 HIGH TACK | DPF 8200X HIGH TACK | DPF 50WD WHITE | DPF 50WD CLEAR | DPF 45WF | DPF 510G/M | DPF 8000 ULTRA TACK CLEAR | DPF 510GTR/MTR | DPF 510GT/MT |
|------------------|-------------|----------|---------------------------|-----------------|---------------|-----------|----------|--------------------|--------------------|---------------------|----------------|----------------|----------|------------|---------------------------|----------------|--------------|
|                  |             |          |                           | •               | •             | •         | •        | •                  |                    |                     |                |                |          | •          |                           | •              | •            |
| ★                | ★           | ★        |                           | •               | •             | •         |          |                    |                    |                     |                | ★              | ★        |            | ★                         |                |              |
| ★                | ★           | ★        | •                         | •               | •             | •         | •        |                    | •                  | •                   |                |                |          |            |                           |                |              |
| ★                | ★           | ★        | ★                         | •               | •             | •         | •        |                    | ★                  | ★                   |                |                |          |            |                           |                |              |
| •                | •           | •        |                           |                 |               |           |          |                    |                    |                     |                |                |          |            |                           |                |              |
| •                | •           | •        | •                         | •               | •             | •         | •        |                    | •                  | •                   |                |                |          |            |                           |                |              |
|                  |             |          | ★<br>▲                    | •               | •             | •         | ★        | •                  | ★<br>▲             | ★<br>▲              | ★              | •              |          | •          |                           | •              | •            |
|                  |             |          |                           | ★               | ★             | ★         |          |                    |                    |                     |                |                |          |            |                           |                |              |
|                  |             |          |                           |                 |               |           |          | ★                  |                    |                     |                |                |          | ★          |                           | ★              | ★            |
|                  |             |          | •                         | •               | •             | •         | ★        |                    | •                  | •                   |                |                |          |            |                           |                |              |
|                  |             |          | ★                         |                 |               |           |          |                    | ★                  | ★                   |                |                |          |            |                           |                |              |

## OUR OVERLAMINATES HAVE THE FEATURES YOU ARE LOOKING FOR



Ease of  
Application



UV  
Stability



Abrasion  
Resistance



Clarity



Temperature  
& Chemical  
Resistance



Prolonged  
Durability

## Choose your Banner

LOW COST SOLUTION FILMS ARE DESIGNED  
FOR YOUR  
**EVERYDAY PROMOTIONAL  
GRAPHICS**

For more product  
information  
Scan the QR-Code



| NAME                                                                                        | DURABILITY UNPRINTED<br>(IN YEARS) | FILM          |                           |        |         | RECOMMENDED<br>USAGE                                      | INK<br>SOLVENTS | SIZE                     |                           |
|---------------------------------------------------------------------------------------------|------------------------------------|---------------|---------------------------|--------|---------|-----------------------------------------------------------|-----------------|--------------------------|---------------------------|
|                                                                                             |                                    | TYPE          | THICKNESS<br>(IN MICRONS) | FINISH | OPACITY |                                                           |                 | ROLL WIDTH<br>(IN METER) | ROLL LENGTH<br>(IN METER) |
| DPF 208  | 1                                  | Polypropylene | 200                       | S      | 80%     | Indoor advertising<br>Roll-Up displays<br>Pop-Up displays | ●               | 0.91<br>1.27             | 30                        |
| DPF 210                                                                                     | 1                                  | Polyester     | 250                       | S/P    | 90%     | Indoor advertising<br>Roll-Up displays<br>Pop-Up displays | ●               | 0.91<br>1.27<br>1.52 ▼   | 30<br>50                  |
| DPF 215                                                                                     | 1                                  | Polyester     | 370                       | S      | 90%     | Indoor advertising<br>Pop-Up displays                     | ●               | 0.91                     | 30                        |

 Environmentally Friendly - ▼ Only available in 30 m roll length



ARLON PRINT PROFILE CENTER

# COLOR BASE

OVER 30,000 ICC PROFILES

## WHY COLOR PROFILES?

- ▶ A profile is essential to optimize the match between printer and material
- ▶ A profile assures that you obtain the highest quality from your printer and material
- ▶ The possibility of false prints is minimal allowing you to save on ink and media usage

FOR MORE INFO VISIT  
**[arlon.color-base.com](http://arlon.color-base.com)**

OR SCAN THE  
QR-CODE





*Wrapped by Digital Precision with SLX+® and Series 3210 Gloss overlaminate*



## Notes



## EUROPE - AFRICA - MIDDLE EAST

**a** Dr. Lelykade 22B, 2583CM Den Haag, The Netherlands

**p** +31 70 354 4311

**f** +31 70 355 7721

## USA

**a** 200 Boysenberry Lane, Placentia, CA 92870

**p** 800 232 7161 / +1 714 985 6300

**f** +1 714 985 6305

## CHINA

**a** No. 1989 Xinchang Road, Weifang, Shandong, 262400

**p** +86 0536 6226568